



weaving a better world™



**RapidWrapper™**


FULLY AUTOMATIC SOLUTION - WOVEN WRAP RELIABILITY™

## Automatically wraps lumber packages in as little as 45 seconds!

### Why DO2 RapidWrapper?

- Automating the lumber wrapping process is faster, safer and saves labor cost
- It uses industry leading and proven WeatherPro™ coated woven wrap
- Extremely low maintenance cost

InterWrap® is confident we have a superior solution to offer the marketplace for automated lumber package wrapping and printing of label information directly on WeatherPro woven wrap. The DO2 RapidWrapper is the logical answer to today and tomorrow's requirements for automation without forsaking quality of wrap. Today's modern wood manufacturers are demanding automatic solutions for streamlined production and increased safety. The DO2 RapidWrapping System has been specifically designed to meet and exceed these requirements with the use of superior strength InterWrap WeatherPro woven polypropylene wrap and ZeroDowntime™ built-in production capabilities.

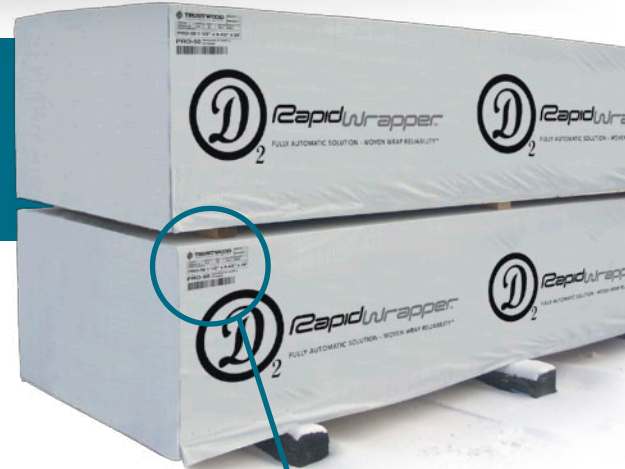

Also available with a commercial grade DO2 WrapPrint™ in-line labeling/bar code printing system



EXCLUSIVELY

Developed for use with WeatherPro lumber wrap

**Zero DOWNTIME™**

**RipStop™**  
TECHNOLOGY

### Advantages of using the DO2 RapidWrapper and a wrap:

- Automatically wrap lumber, EWP & OSB packages in as little as 45 seconds!
- Wrapping system drastically reduces wrapping and labeling labor with ROI in as little as one year dependent upon number of units wrapped
- ZeroDowntime™ - wrapper works in fully automatic & semi-automatic modes!
- New patent pending DO2 WrapPrint™ label printing system automatically prints label information directly on the wrap eliminating the need to purchase or apply labels
- Unlike cross laminated or standard stretch wrap blown film systems, the DO2 RapidWrapper can adjust the wrapping tension allowing for optimized air flow between the wood and the wrap allowing for faster dry time and optimized mold control
- Unit can wrap various widths and lengths of packages from 5' to greater than 64' in length
- Self loading multiple width roll dispensers for faster cycle times
- Small footprint and open structure design allows for easy access and low maintenance cost. No hydraulics, operated by simple pneumatic and electric servo motors. Equipment is virtually maintenance free, no oiling or greasing required
- Leasing programs available



weaving a better world™



RapidWrapper™

FULLY AUTOMATIC SOLUTION - WOVEN WRAP RELIABILITY™

The DO2 RapidWrapping System is the most cost effective automatic solution that is designed to use the packaging industry's most reliable, proven strength InterWrap WeatherPro woven polypropylene wraps which are 100% recyclable. Whether you are shipping across town or across the continent, the interwoven polypropylene tapes sealed inside layers of advanced polymer coatings will provide the protection your packages need to arrive looking mill fresh.



TRUSTWOOD  
QUALITY LUMBER YOU CAN TRUST

BUNDLE TYPE
ORDER NUMBER

PRODUCED	QUANTITY	LENGTH	LINEAL FEET	ESTIMATED
4569G2-35	12.0	22	352.0	695.3

PRODUCT DESCRIPTION				
<b>PRO-50 1 1/2" x 9 1/2" x 24'</b>				

**PRO-50** PACKAGED BY SHIFT: A  
07/10/2009



Another unique time and cost saving feature of the DO2 RapidWrapping System is the optional patent pending DO2 WrapPrinter™ in-line printer. You can now print your label information and anything else you wish directly on InterWrap WeatherPro wrap! And it can be instantly updated, no more label re-orders or labels falling off packages!

Also available on the DO2 RapidWrapper is the "Multiple Width Roll Loading" option. This tailor-made feature gives you the flexibility of preloading multiple rolls (as many as required) of varying widths and change on the fly!

### DO2 RapidWrapper high strength WeatherPro™ woven polypropylene wrap vs. poly film

	DO2 RapidWrapper woven wrap	Poly film
Operational in automatic & semi-automatic modes	Yes	No
Optional in-line printing directly onto wrap	Yes	No
Tensile strength - ASTM-D882	MD: 60 lbs/in CD: 60 lbs/in	MD 12 lbs/in CD 11 lbs/in
Tear strength - ASTM-D4533	MD 48 lbs CD 44 lbs	MD 9 lbs CD 12 lbs
Ball burst - ASTM-D751	160 lbs	40 lbs
Reinforcing weave count	5 x 5	None

MD = Machine Direction, CD = Cross Direction

Test data is based on average taken over several production runs and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications. All values ± 10 %.

Polyolefin woven fabrics are manufactured in accordance with national standards which allow for non-critical variances in weights and measures. InterWrap Inc. does not guarantee the above results as we cannot anticipate all of the conditions or types of materials from different manufacturers for which the products may be used. The end user is advised to test and evaluate all materials and products for their safety and suitability. InterWrap Inc. accepts no responsibility for the safety and suitability of products or materials used.

The DO2 RapidWrapper is manufactured by:

